

# CT 45

[NEW]

## Great Productivity



Scrubs in difficult to reach areas



Solution control (Solenoid valve)



Brush control with soft start



## High Performance



CFS (Center Flow System)



High quality and performance vacuum motor

## Ergonomics, User Friendly



Great manoeuvrability thanks to an optimum weight distribution



Extractable recovery tank



Easy to transport



Battery level indicator



### Technical data

		CT45 C	CT45 B
Scrubbing width	mm	500	500
Suction width	mm	598	598
Productivity (max speed)	m <sup>2</sup> /h	1750	1750
Number of brushes		1 (disc)	1 (disc)
Solution tank capacity	l	40	40
Recovery tank capacity	l	45	45
Power supply		230V 50Hz	24V
Max speed	Km/h	3,5	3,5
Weight	Kg	70	118 (batteries included)
Dimensions (LxWxH)	mm	567x842x1226	567x842x1226



# CT 45



## Low Maintenance Cost




Brush replacement without tools



Squeegee blades can be used on 4 sides before replacement



Easy access to internal compartments

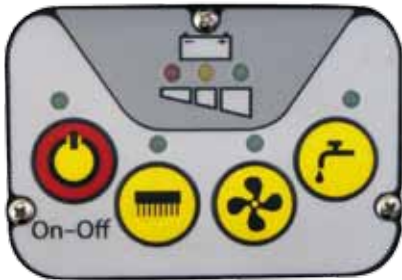

## Easy to use control panel

The control panel, easy to use and intuitive, allows to activate the brush, the vacuum motor and water supply.

## Robust Construction



Tanks and surrounding body in high density polyethylene



Oil bath reduction gear box



Brush head designed to absorb harsh impact (optional)



Squeegee system designed to absorb harsh impact



Panel control switches protected against water and humidity




## Height-adjustable handlebar

It is possible to adjust the handlebar height during work to ease the cleaning operations in difficult to reach areas.



## Removable recovery tank

The recovery tank can be removed simply without tools to help the operations of dirty water drain and have an easy access to internal compartments.



IPC